



HTRP24 WIRED DIGITAL THERMOSTAT QUICK GUIDE



Manufacturer: SALUS Controls plc
Units 8-10, Northfield Business Park,
Forge Way, Parkgate Rotherham,
S60 1SD, United Kingdom

Importer: Salus Controls European
Distribution sp.z o.o.
ul. Szamocka 8, piętro 6., 01 748
Warszawa, Poland

UK: tech@salus-tech.com
DE / NL: info@salus-controls.de
PL: poland@saluscontrols.com
FR: technicalsupport@saluscontrols.fr
RO: tehnic@saluscontrols.ro
DK: Support@salus-controls.dk



www.saluscontrols.com

SALUS Controls is a member of the Computime Group.
Maintaining a policy of continuous product development
SALUS Controls plc reserve the right to change specification,
design and materials of products listed in this brochure
without prior notice.



Introduction

HTRP24 is a stylish and accurate programmable digital room thermostat which requires 24V power supply. You can now simply adjust your home temperature as desired in order to create a comfortable home environment.




Product Compliance

This product complies with GPSR 2023/988/EU, EMC 2014/30/EU, LVD 2014/35/EU, RED 2025/138/EU and RoHS 2017/2102/EU. Full text of the EU Declaration of Conformity on www.saluslegal.com.

Safety Information


Use in accordance with the regulations. Indoor use only. Keep your device completely dry. Disconnect your device before cleaning it with a dry cloth. The installation must comply with the guidance, standards and regulations applicable to the city, country or state where the product is installed. Failure to comply with the relevant standards could lead to prosecution.

Icons description

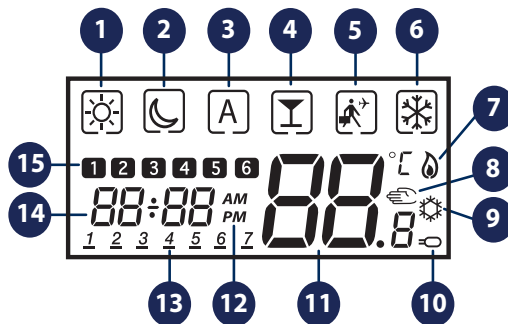

- | | |
|-------------------------------------|-------------------------|
| 1. Comfort temperature | 9. Cooling icon |
| 2. Reduced temperature | 10. Sensor icon |
| 3. Auto mode | 11. Current Temperature |
| 4. Party mode | 12. AM/PM |
| 5. Holiday mode | 13. Day of the week |
| 6. Frost protection mode | 14. Clock |
| 7. Heating icon | 15. Program number |
| 8. Manual Mode / Temporary Override | |


Wiring diagram

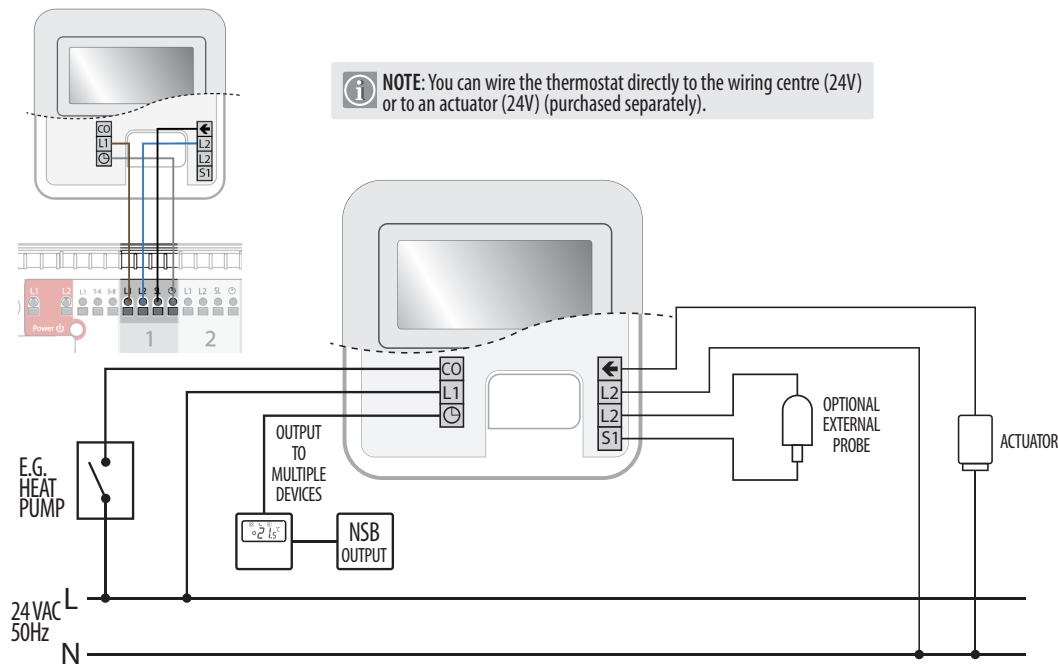


Button functions


- | | |
|------|---|
| < > | Mode selection. Long press < to return to main screen without saving. Short press < to return to previous screen. |
| ✓ | OK key. Short press to confirm selection. Long press to save and return to main screen. Long press to enter Program/Clock/Offset. |
| ✓ ^ | Decrease or increase Setpoint Temperature. Decrease or increase Day, Clock. |
| <+ ^ | Press and hold both buttons to enter installer mode. |

Installation

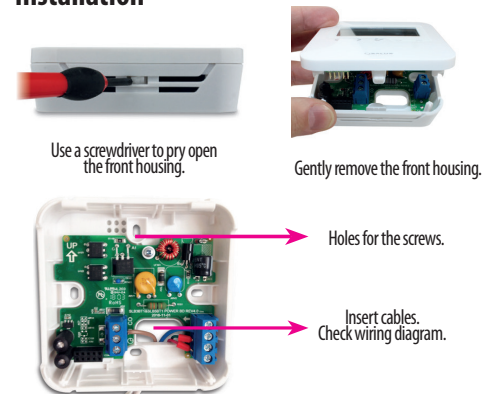


Setting the time and date

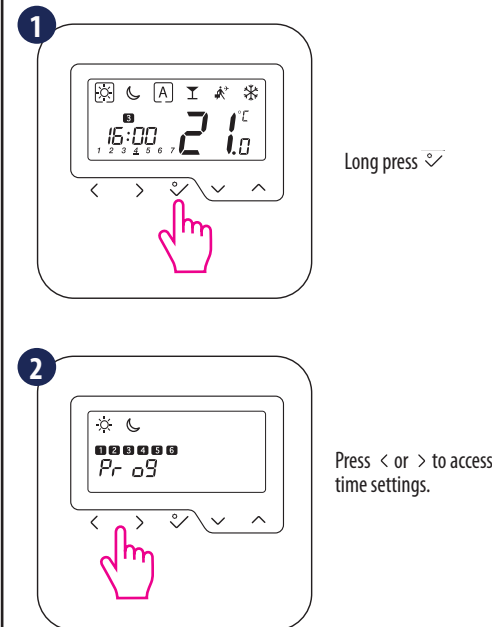





Press ✓ to confirm.




Press < or > to select 12/24 format.
Press ✓ to confirm.



Set the **hour** by using < or >.
Press ✓ to confirm.




Set the **minutes** by using < or >.
Press ✓ to confirm.




Set the **year** by using < or >.
Press ✓ to confirm.


Programming the thermostat



Long press ✓




Press ✓ to enter program settings.




Choose your program type by using < or >.
Press ✓ to confirm.

Note: There are 3 program types available: Working Week 5+2 (1-5 + 6, 7), All week the same (1-7) and Individual Days (1,2,3,4,5,6,7).




Set the **hour** by using < or >. Repeat the process for setting the **minutes**.
Press ✓ to confirm.




Select the desired temperature ☀ or ☁ by pressing < or >.
Press ✓ to confirm.

Note: Repeat the procedure for each program.


Installer mode




Press and hold < and > for 3 seconds.



Select P49.




Press ✓ to confirm.




You have reached Installer Mode. Select setting by pressing < or >.
Press ✓ to enter program settings.


Resetting the device




Press and hold < and > for 3 seconds.




Select P47 if you want to reset to factory settings.



Press ✓ to confirm.



Press ✓ to confirm.



Display will show all elements. Thermostat will reset to factory settings.