
SYSTEM DELETE

SYSTEM DELETE



If at any time you need to delete ALL installed iT600 devices from your Zigbee network follow the steps below. As this procedure can have a serious affect on your heating / cooling system. It should only be carried out by your installer.

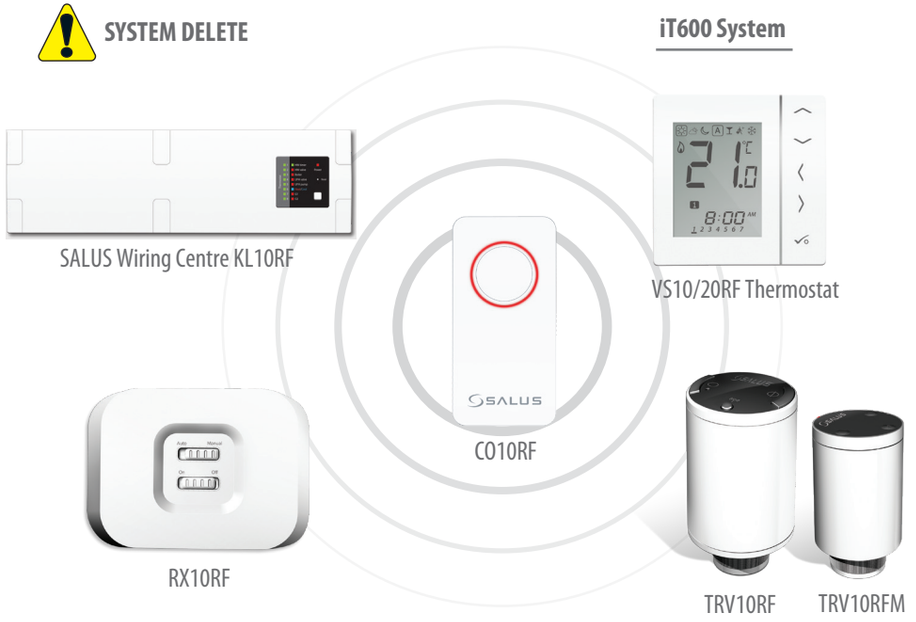

Press for 15 seconds to activate identify mode.

The button colour will change to AMBER to indicate system delete. At this point, the proceedure cannot be cancelled.

After all devices have been deleted from the Zigbee network, they will need to be re-installed. Please refer to all relevant instruction manuals.

WARRANTY

SALUS Controls warrants that this product will be free from any defect in materials or workmanship, and shall perform in accordance with its specification, for a period of five years from the date of installation. SALUS Controls sole liability for breach of this warranty will be (at its option) to repair or replace the defective product.

Customer Name: .....

Customer Address: .....

..... Post Code: .....

Tel No: ..... Email: .....

Engineers Company: .....

Tel No: ..... Email: .....

Instalation Date: .....

Engineers Name: .....

Engineers Signature: .....

TECHNICAL DETAIL

Model	C010RF
Type	Zigbee Coordinator
Function	Zigbee network coordinator for iT600 system
Control	Open - Close the Zigbee network
Indication	Tri Colour LED - RED - GREEN - AMBER
User Interface	Single push button
Operating Temperature	0 to 50 °C
Storage Temperature	-20°C to 60°C
Frequency	2.4 GHz
Power Source	230V 50Hz via mains adaptor (supplied)
Approval	CE

SALUS CONTROLS

Zigbee Coordinator

Models: C010RF



INSTALLER / USER MANUAL

Manufacturer: SALUS Controls plc
Units 8-10, Northfield Business Park,
Forge Way, Parkgate Rotherham,
S60 1SD, United Kingdom

Importer: Salus Controls European
Distribution sp.z o.o.
ul. Szamocka 8, piętro 6., 01-748
Warszawa, Poland

Computime

www.saluscontrols.com

SALUS Controls is part of the Computime Group

In accordance with our policy of continuous product development, SALUS Controls plc reserves the right to modify the specifications, design, and materials of the products shown.

11/2026

Box Contents



1 x Installer / User manual

1 x C010RF



1 x EU Plug Adapter

For PDF Installation guide please go to **www.salus-controls.com**

Product Compliance

This product complies with the essential requirements and other applicable provisions of the GPSR Directive 2023/988/EU, the RED Directives 2014/53/EU and 2025/138, the RoHS Directives 2015/863/EU and 2017/2102/EU, and REACH SVHC 253. The full text of the EU Declaration of Conformity is available at the following address: www.saluslegal.com.
RF: 2402–2480 MHz, <14 dBm for ZigBee

Warning

These instructions are applicable to the SALUS model stated on this instruction guide.

This product must be fitted by a competent person, and installation must comply with the guidance, standards and regulations applicable to the city, country or state where the product is installed. Failure to comply with the requirements of the relevant guidance, standards and regulations could lead to injury, death or prosecution.

Warning

Always isolate the AC Mains supply before installing or working on any components that require 230 VAC 50Hz supply.

We hope you enjoy this product...


SYSTEM OVERVIEW

INTRODUCTION

Thank for purchasing the SALUS C010RF Zigbee coordinator. The Zigbee coordinator controls the Zigbee communication of your iT600 system.

Please refer to individual device manuals for more information.

The Zigbee coordinator must be used with the iT600 RF range of products below:

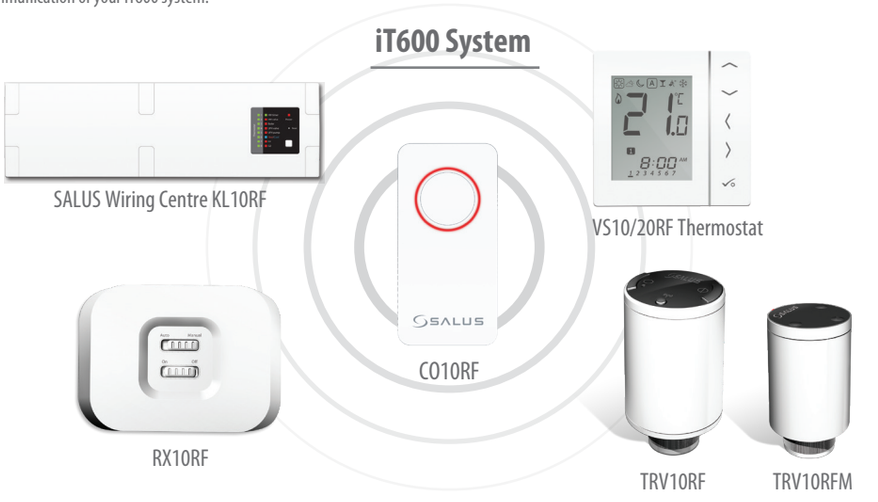

INSTALLATION



1 Plug

+

Coordinator



2 Attach Coordinator to USB adaptor.

INSTALLATION



3 Insert the adaptor into 230V mains outlet.



4 Switch the 230V mains outlet on and ensure the button is illuminated (red) as shown above.



5 To commence system installation press and hold the button until for 5 seconds or the button starts flashing red. This means the Zigbee network is ready to accept iT600 devices.

6 Please refer to individual device manuals.



7 When everything is paired press and hold button for 5 seconds or flashing stops.

Maintenance

If replacing or adding iT600 devices please ensure you follow steps 6 to 8.

CHECKING SYSTEM CONFIGURATION

To check that the complete system is communicating and has been configured correctly, you can use identify mode.

Using identify from the coordinator will show all products that are connected to your system.

