
SALUS CONTROLS EN



MULTI-LANGUAGE

SW600
DOOR/WINDOW SENSOR
QUICK GUIDE

▪ MANUAL ▪

Introduction

A door/window sensor is a small, wireless piece of equipment that detects when a door/window is open or closed. The slim door/window sensor is used primarily on windows and doors where the installtion location is narrow. This product must be used with the Universal Gateway (UG600/UGE600 or UG800) and the Salus Premium Lite App.

Product Compliance

This product complies with the essential requirements and other relevant provisions of Directives GPSR 2023/988/EU, RED 2025/138/EU and RoHS 2015/863/EU amendment 2017/2102/EU, REACH 253 SVHC substance. The full text of the EU Declaration of Conformity is available at the following address:
www.saluslegal.com

2405-2480MHz, <14dBm

Safety Information

Use in accordance with the regulations. Indoor use only. Keep your equipment completely dry. Disconnect your equipment before cleaning it with a dry cloth.


Manufacturer:
SALUS Controls plc
Units 8-10, Northfield Business Park,Forge Way,
Parkgate Rotherham, S60 1SD, United Kingdom
Importer:
Salus Controls European Distribution sp.z o.o.
ul. Szamocka 8, piętro 6., 01 748 Warszawa, Poland
www.saluscontrols.com
Computime

SALUS Controls is a member of the Computime Group. In accordance with its policy of continuous product improvement, SALUS Controls plc reserves the right to modify the technical specifications, design, and materials of the products featured in this brochure without prior notice.

08/2026

Positioning



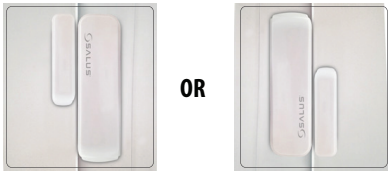

On the door

OR

On the window

Power up & Pairing


1




2



3

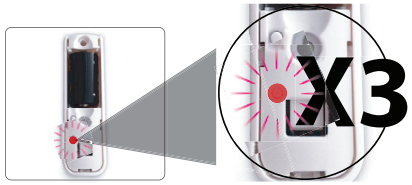


4

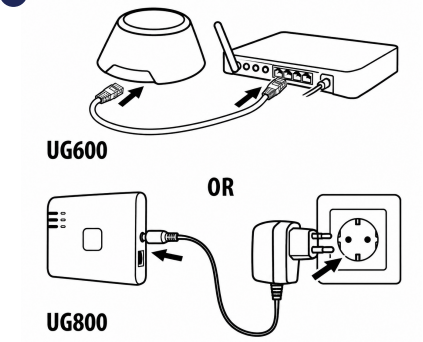


5




6




7




8



9




10




11 Follow the onscreen instruction

12

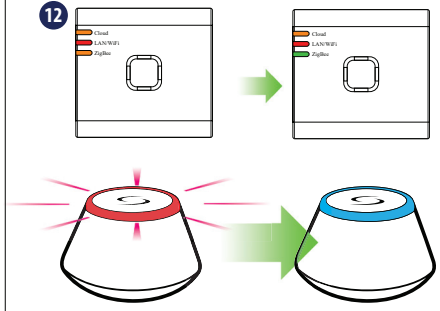

13

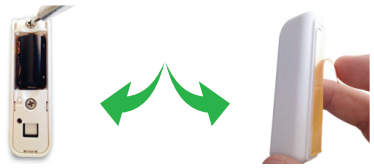

Install the slim window/door senor using the screws or the double-sided tape.

Open/Closed



Δ < 25 mm

Δ > 25 mm

Factory reset

Remove the battery, hold down the reset button for 4 seconds while putting the battery back in.

The device will reset and enter pairing mode.



