




Technical Datasheet Technisches Datenblatt

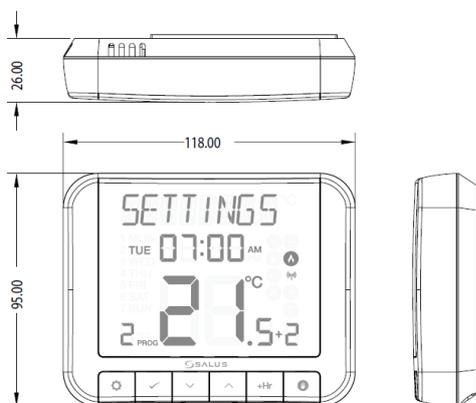

Deutsch

RT520

Der RT520 ist die neueste Ergänzung zu der erfolgreichen RT-Serie der Heizungsthermostate.

Load Compensation	Load Compensation is one of the 4 energy saving features that makes a system Boiler Plus compliant. Therefore the RT520 will be the most cost effective fully compliant thermostat option on the market.
Optimisation Functions	Optimum Start and Optimum Stop
New Larger Clear easy to read LCD	Simple, quick and straightforward operation and setup for all users.
TPI (Time Proportional & Integral) 'self-learning' Functionality	More precise heating control with increased comfort and improved energy efficiency.
ErP Rating V	Improved ErP rating means better efficiency rating of the whole system and total cost reductions. ErP IV is a benchmark minimum for some EU markets.
Service Mode	Thermostat can be programmed to ensure home occupier is aware a boiler service is required and landlord can access to action.
Landlord PIN	PIN entry option for landlord/building owner only access to certain settings and menus

English

RT520

The RT520 is one of the latest additions to SALUS' tried and tested RT range of thermostat heating controls.

Load Compensation	Load Compensation is one of the 4 energy saving features that makes a system Boiler Plus compliant. Therefore the RT520 will be the most cost effective fully compliant thermostat option on the market.
Optimisation Functions	Optimum Start and Optimum Stop
New Larger Clear easy to read LCD	Simple, quick and straightforward operation and setup for all users.
TPI (Time Proportional & Integral) 'self-learning' Functionality	More precise heating control with increased comfort and improved energy efficiency.
ErP Rating V	Improved ErP rating means better efficiency rating of the whole system and total cost reductions. ErP IV is a benchmark minimum for some EU markets.
Service Mode	Thermostat can be programmed to ensure home occupier is aware a boiler service is required and landlord can access to action.
Landlord PIN	PIN entry option for landlord/building owner only access to certain settings and menus

Technische information :

Spannung	2xAA Batteries
Schaltspannung	3 (1) A SPDT
Eingang/Ausgang	0 - 230V
Abmessungen	B-118 H-95 T-26
Temp. Bereich	5-35°C

Supply	2xAA Batteries
Switching Max	3 (1) A SPDT
Input/Output	0 - 230V
Dimensions	W-118 H-95 D-26
Scale	35°C

Funktion	Parameter	Beschreibung
Temperaturgenauigkeits Anzeige	0.1°C oder 0.5°C	Auswahl zwischen Genauigkeitsanzeige
Handbetrieb		Setzt den Thermostat in manuellen Betrieb
Frostschutzbereich	5.0°C-17.0°C	Frostschuttemperatur

Function	Parameter	Description
Temperature display increments	0.1°C or 0.5°C	Select the temperature display increments
Manual mode		Sets your thermostat to manual mode
Frost setpoint	5.0°C-17.0°C	Set the frost point temperature

Anschluss

COM	Eingang
NC	Stromlos geschlossen
NO	Stromlos offen

Wiring

COM	Input
NC	Switch live off
NO	Switch live on

Date/Version

16.03.2017 V2.0

Technical disclaimer

We reserve the right to alter our products without notice. This also applies to products already on order provided that such changes do not change the functionality of the product

Contact

SALUS Controls GmbH
Dieselstrasse 34
63165 Mühlheim am Main
Tel: 06108-825850
Fax: 06108-8258529
Verkauf: Verkauf@salus-controls.de