



Installation Manual



SCAN
Multilanguage
Manual

Introduction

The IT700 is an ultra-slim smart thermostat, just 11 mm thick, perfect for heating and cooling control. It uses Zigbee communication, has a rechargeable battery, and includes a magnetic wall plate and a desk stand. It is conveniently integrated in the SALUS Smart Home system.


Product Compliance

This product complies with the essential requirements and other relevant provisions of Directives 2014/53/EU, 2015/863/EU. The full text of the EU Declaration of Conformity is available at the following internet address: www.saluslegal.com.
(CE) 2405-2480MHz; <20dBm (Wifi)

Safety Information

Use in accordance to national and EU regulations. Use the device as intended, keeping it in dry condition. Product for indoor use only. Installation must be carried out by a qualified person in accordance to national and EU regulations. Disconnect your equipment before cleaning it with a dry cloth.


LCD Icon Description

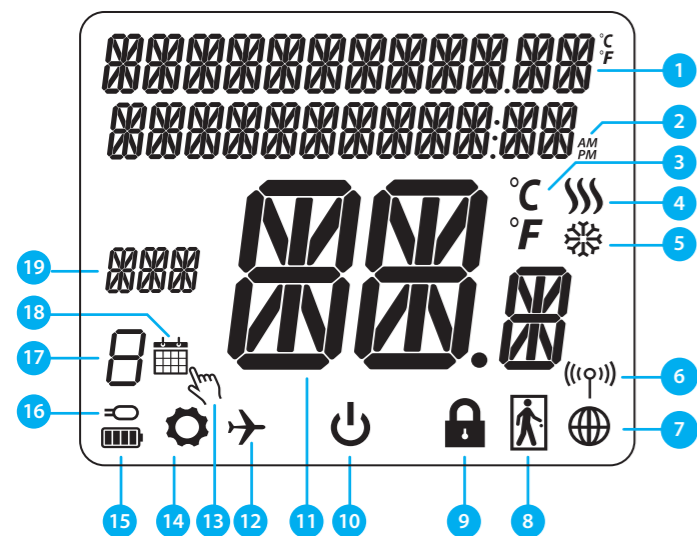


- 1. Menu/Settings description + Clock
- 2. AM/PM
- 3. Temperature unit
- 4. Heating indicator (icon is animating when there is heating demand)
- 5. Cooling indicator (icon is animating when there is cooling demand)
- 6. RF Connection indicator
- 7. Internet connection indicator
- 8. Occupancy sensor (hotel card)
- 9. Key lock function
- 10. Standby mode icon
- 11. Current Temperature / Setpoint Temperature
- 12. Holiday mode
- 13. Temporary override mode
- 14. Settings icon
- 15. Battery status indicator
- 16. External / Floor temp sensor indicator
- 17. Schedule program number
- 18. Schedule mode icon
- 19. Day indicator / SET information

Buttons Description


| Button | Function |
|--------|--|
| | 1) Menu button / Return button. 2) In the MAIN SCREEN: Press and hold for 3 sec to change the thermostat operating mode (Schedule mode / Permanent mode / Temporary override mode). 3) In the SETTINGS SCREEN: Press and hold for 3 sec to go back without saving the changes. 4) In the PAIRING SCREEN (in SYSTEM TYPE Menu): Press and hold for 3 sec to see other pairing options. |
| | „Down“ Button (Decrease parameter value/moving on the menu in 'DOWN' direction) |
| | “Up“ Button (Increase parameter value/moving on the menu in 'UP' direction) |
| | 1) Press and hold for 3 seconds to POWER UP new device 2) “OK / Tick“ Button (Confirm parameter value / Go to the next menu / Save settings) 3) In the MAIN SCREEN: Press and hold for 3 seconds to enter Standby mode 4) In the SETTINGS SCREEN: Press and hold for 3 sec to go back to the MAIN SCREEN & SAVE all the changes. 5) During PAIRING process – hold button for 3 seconds to POWER OFF or REBOOT the thermostat |
| | In the MAIN SCREEN – press and hold these buttons together for 3 seconds to LOCK / UNLOCK the Thermostat keys). |

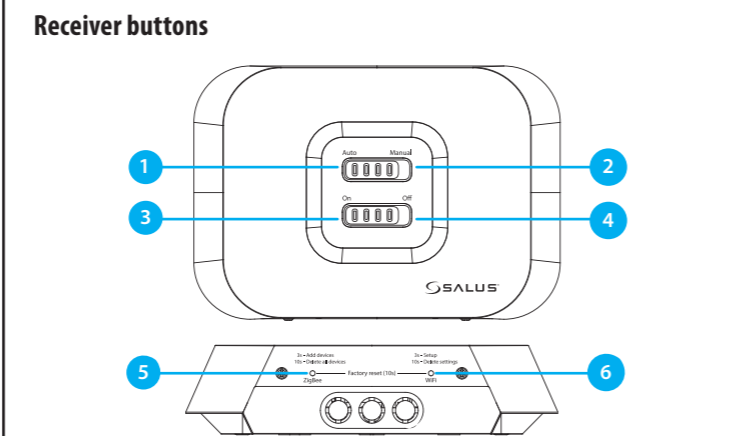

Note: Press and hold for 10 seconds the ZigBee and WiFi buttons to perform the Factory Reset.


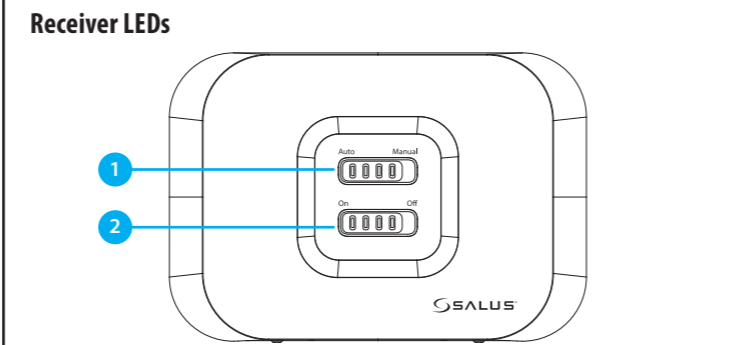


| 1 AUTO - MANUAL BUTTON | 2 ON - OFF BUTTON |
|-------------------------------|--|
| Connected to internet | Cool demand |
| Define internet connection | ZigBee network is open |
| Internet settings not defined | No heat/cool demand OR No devices linked with receiver |
| OTA in progress | ZigBee network is in identifying mode |
| Lost internet connection | When devices is found and added to the network |
| | Heat demand |
| | During deleting all paired devices |

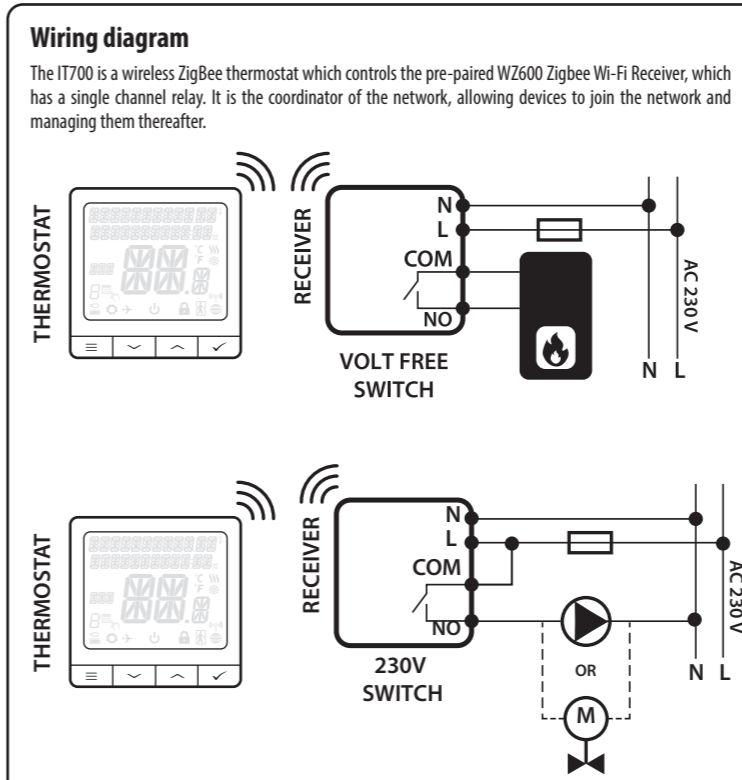


Pairing Process

Note: The thermostat and the receiver arrive pre-paired from the factory. In case you need to pair again, please follow the steps below:

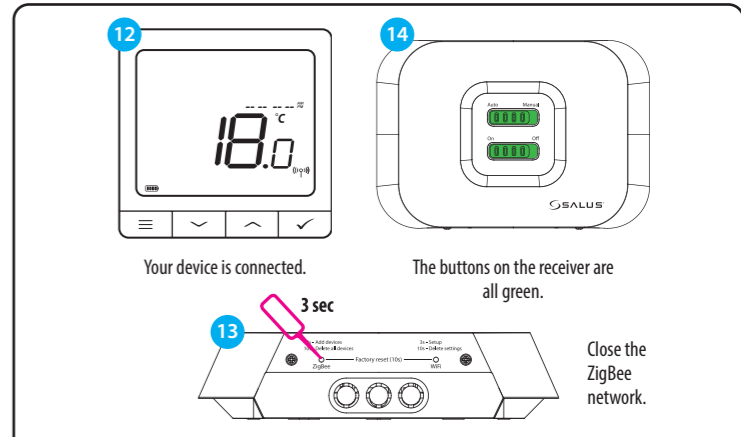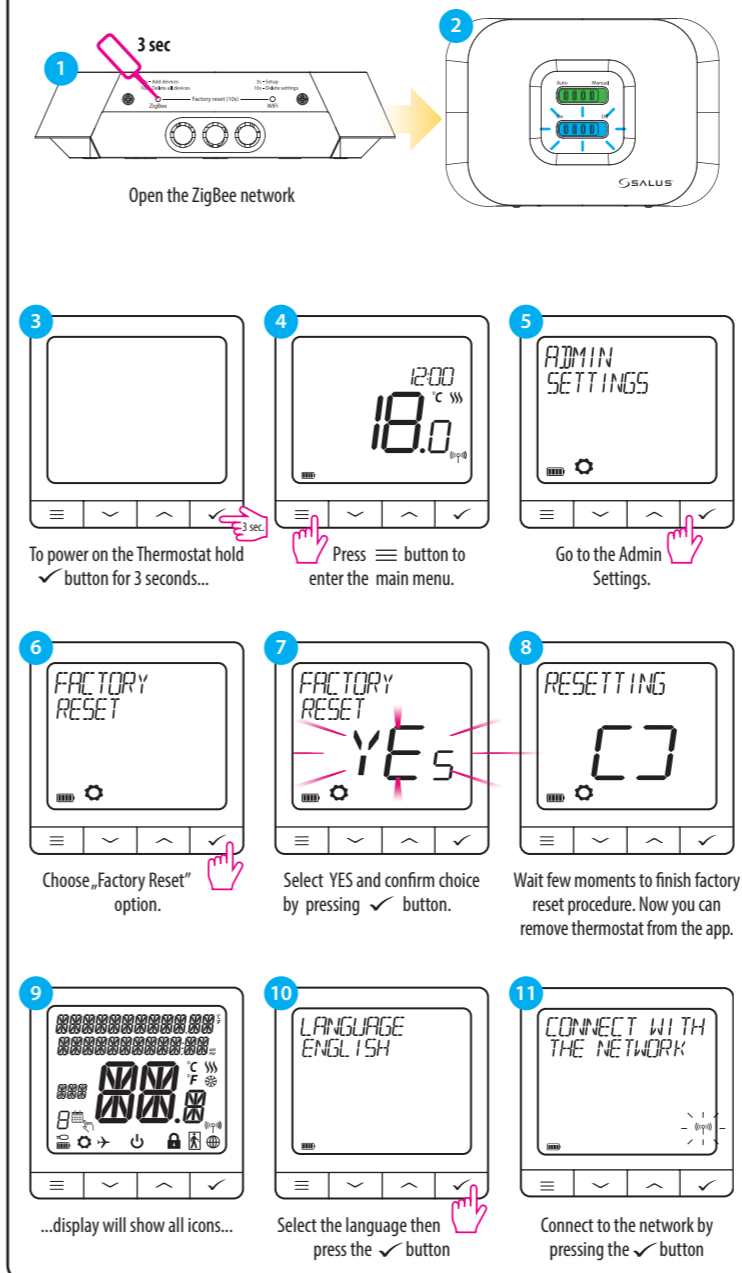

THERMOSTAT FUNCTIONALITIES:


First power up sequence

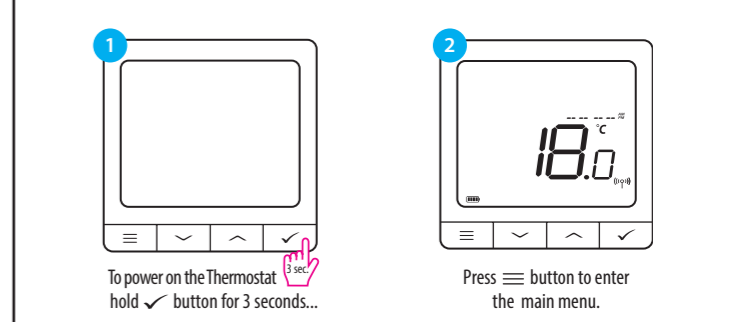

Operating modes

1. Changing from Manual mode to Schedule mode

IT700 thermostat is in manual mode by default. To change modes, press the button for 3 seconds to switch to Schedule Mode.

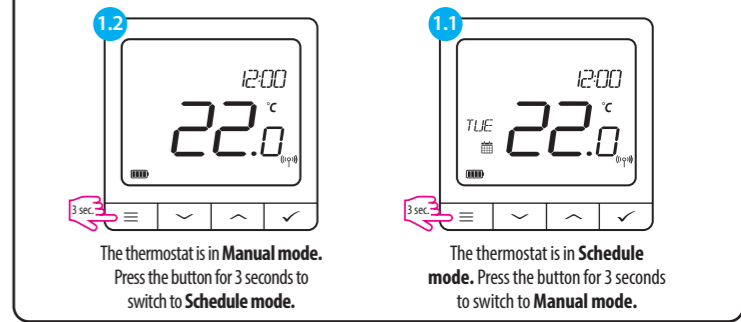

HEAD OFFICE:

SALUS Controls
Units 8-10, Northfield Business Park, Forge Way, Parkgate Rotherham, S60 1SD

SALUS Controls GmbH,
Dieselstrasse 34,
63165 Mühlheim am Main,
Germany


Email: sales@salus-tech.com

www.saluscontrols.com


SALUS Controls is a member of the Computime Group. Maintaining a policy of continuous product development SALUS Controls plc reserve the right to change specification, design and materials of products listed in this brochure without prior notice.

2. Standby mode

STANDBY mode is a special setpoint temperature which can be activated/deactivated in any time. It can work like a frost protection or overheating protection when needed. When standby mode is activated, the clock continues running (although it is not displayed), and the temperature sampling also continues. To enter **STANDBY mode** hold the button for 3 seconds on your thermostat. You can always turn off **STANDBY mode** by holding the button for 3 seconds again.

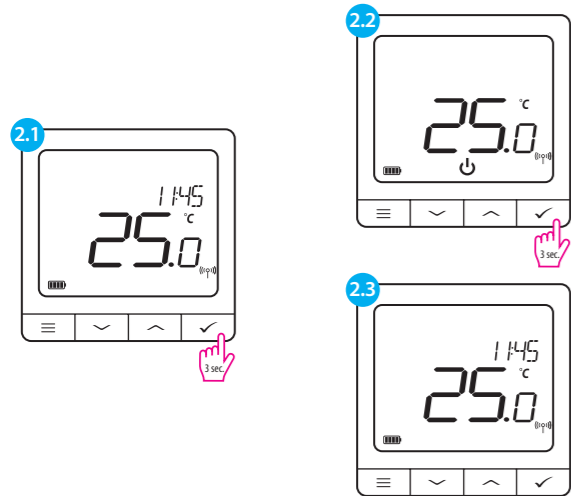

3. Schedule mode

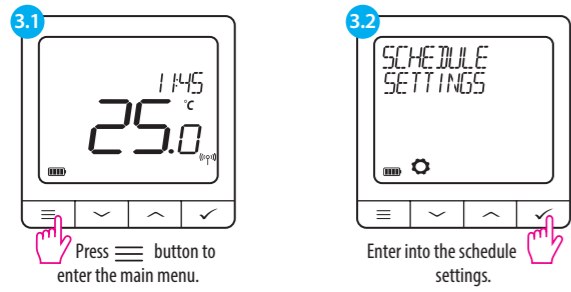


There are 3 possible schedule options. Use or buttons to select schedule variant and confirm by button




Separate schedule for **WORKING DAYS** and separate schedule for **WEEKENDS**
 One schedule for **WHOLE WEEK**
 Seven separate schedules for **SINGLE DAYS**

Schedule programming example for the **WHOLE WEEK** variant:

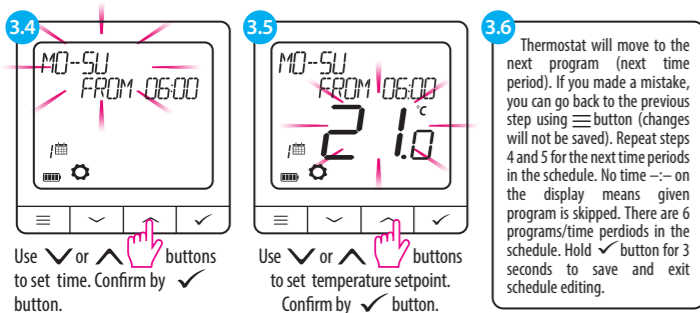

After setting the schedule thermostat is working in schedule mode. You can see calendar icon on the display:




*Default schedule in Offline mode


| 7 days (Monday to Sunday) | | |
|---------------------------|-------|-------------|
| Program | Time | Temperature |
| 1 | 6:00 | 21 °C |
| 2 | 23:00 | 19 °C |

Heat / Cool Selection

IT700 thermostat can work in heating or cooling mode. To set thermostat operating mode please follow steps below:

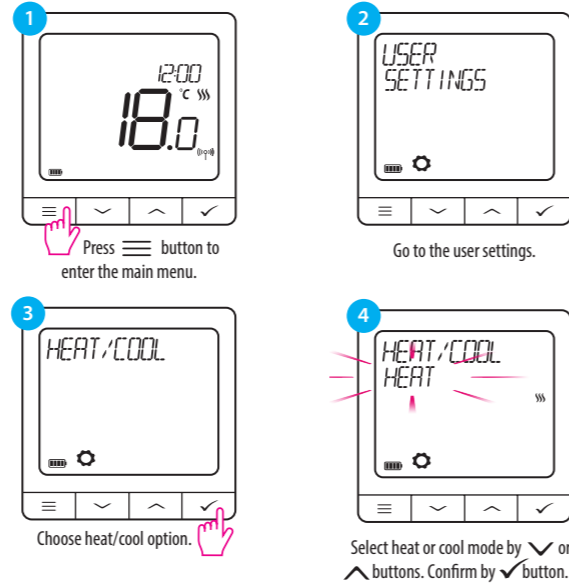


Advanced menu - RF signal

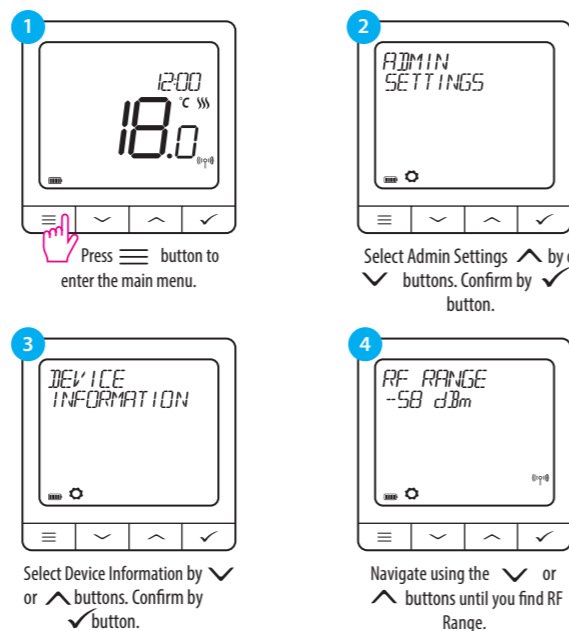

Factory Reset

To **RESET** IT700 thermostat to its factory default settings please follow steps below:

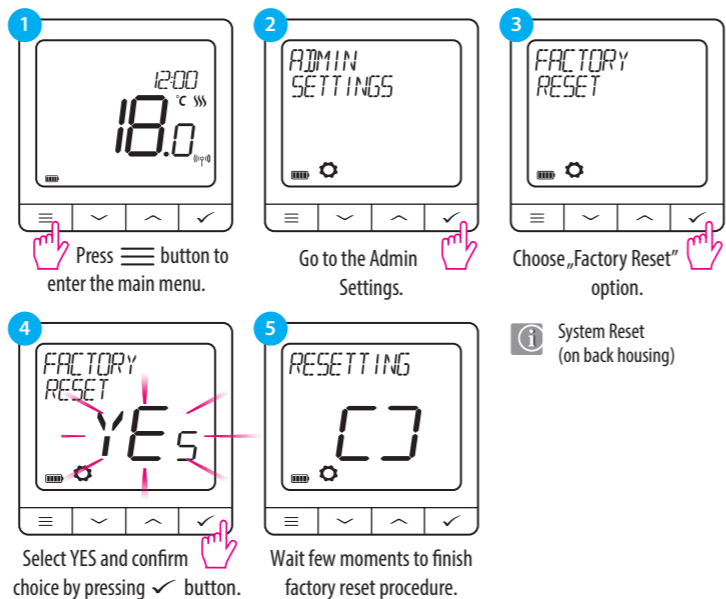

Connect your thermostat to the SALUS APP

Installation in Online Mode - Using Bluetooth
 Power on the device, then follow these steps to gain control via the Salus Premium Lite app.

